

JNBM144-430~450

High efficiency dual-glass bifacial mono solar module

JNBM144

Ga-doped silicon wafer, reduce LID and LeTID. SE technology effectively improves cell conversion efficiency.

MBB and half-cell design to reduce shadow effects, improve module reliability and reduces loss.

The dual-glass structure effectively reduces the risk of cell cracking and improves the weatherability of the module. Al frame improves mechanical performance, making it easier to transport and install.


Compatible with 1500V system voltage to reduce construction cost per watt.

CERTIFICATION



TUV: IEC/EN 61215, IEC/EN 61730
BIS: IS 14286/IEC 61215, IS/IEC 61730
KS: KS C 8561
GB/T 19001-2016/ ISO 9001:2015
GB/T 24001-2016/ ISO 14001:2015
GB/T 45001-2020/ ISO 45001:2018
CNAS-CL01: ISO/IEC 17025:2017

QUALITY ASSURANCE

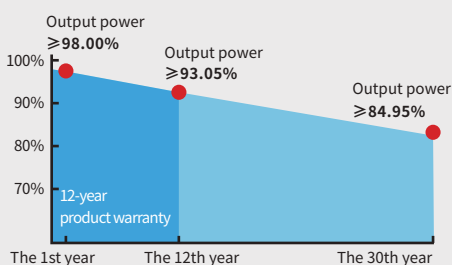

Advanced production process

Optimized MBB design
Cell efficiency >23.0%



Superior quality control

Full automatic production line
MES and ERP digitizing logistics management
100% three times EL and appearance inspection



Excellent power generation performance

0~+5W positive power tolerance
Improved low light irradiance performance and low degradation



Stable mechanical performance

Passed rigorous hail test
Withstands 5400Pa snow and 2400Pa wind loads




Long weather resistance

Excellent anti-PID performance
Certified in fireproofing for safety



JINNENG CLEAN ENERGY TECHNOLOGY LTD JINNENG PHOTOVOLTAIC TECHNOLOGY LTD

No.1 Wenshui Economic Development Zone, Lvliang, Shanxi 032100, China
No. 533, East Guang'an Street, Yuci District, Jinzhong, Shanxi 030600, China
Tel: +86(354)2037999 E-mail: sales@jinery.com

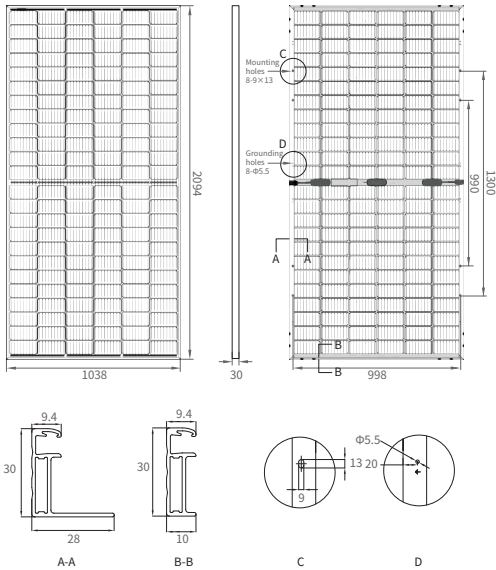

MECHANICAL PARAMETERS

Cell (mm)	166*83 Bifacial Mono
Dimensions (L*W*H) (mm)	2094*1038*30
Weight (kg)	26.3
Cable Cross Section Size (mm ²)	4
No. of Cells & Connections	144(6*24)
No. of Diodes	3

Temperature Cycling Range (°C)	-40~+85
Max. Series Fuse Rating (A)	20
Max. Wind Load / Max. Snow Load (Pa)	2400 / 5400
Hot Spot Rate	100% Free
Fire Rating	Class C
Junction Box & Connector Protection Grade	IP68
Bifacial Factor(%)	70±5

QUALIFICATION

ELECTRICAL PARAMETERS

Module Type (1500V DC)		JNBM144-430	JNBM144-435	JNBM144-440	JNBM144-445	JNBM144-450
STC AM1.5 1000W/m ² Cell Temperature 25°C	Max. Power at STC (Pmpp/W)	430	435	440	445	450
	Output Tolerance (W)	0-+5	0-+5	0-+5	0-+5	0-+5
	Max. Power Voltage (Vmp/V)	41.19	41.39	41.59	41.79	41.99
	Max. Power Current (Imp/A)	10.44	10.51	10.58	10.65	10.72
	Open Circuit Voltage (Voc/V)	49.60	49.80	50.00	50.20	50.40
	Short Circuit Current (Isc/A)	11.09	11.16	11.23	11.30	11.37
	Module Efficiency (%)	19.78	20.01	20.24	20.47	20.70
Power Gain		10%		20%		30%
With Different Power Generation Gain (Regarding 440W as an example)	Max. Power at STC (Pmpp/W)		484	528		572
	Max. Power Voltage (Vmp/V)		41.62	41.61		41.60
	Max. Power Current (Imp/A)		11.63	12.69		13.75
	Open Circuit Voltage (Voc/V)		49.73	49.74		49.56
	Short Circuit Current (Isc/A)		12.35	13.47		14.59
	Module Efficiency (%)		22.27	24.29		26.32

*Measurement tolerance: Pmax: ±3%, Voc: ±3%; Isc: ±5%.


PACKING CONFIGURATION

Pieces Per Pallet	36
Pallets Per Stack	2
Stacks Per Container	11
Pieces Per Container	792

TEMPERATURE COEFFICIENTS

Nominal Module Operating Temperature (NMOT)	43±2°C
Temperature Coefficient Voltage (Voc)	-0.29 %/°C
Temperature Coefficient Current (Isc)	0.04 %/°C
Temperature Coefficient Power (Pm)	-0.35 %/°C

I-V CURVE (440W)

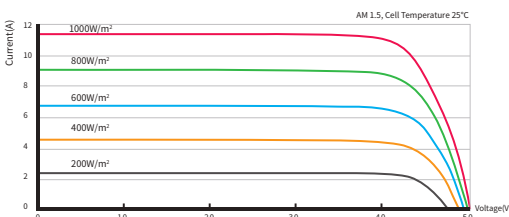

Optional

Connector Type	<input type="checkbox"/> MC4 Compatible	<input type="checkbox"/> MC4
Cable Length	<input type="checkbox"/> 400mm / 200mm	<input type="checkbox"/> Customized
Frame Color	<input type="checkbox"/> Silver	<input type="checkbox"/> Black

Notes: